






V[•]SCREEN

CASPER SERIES

SPECIFICATIONS

Model	Casper 3.9	Casper 7.8	Casper 10.4
Picture			
Pixel Pitch(mm)	3.9 * 7.8	7.8 * 7.8	10.4 * 10.4
Pixel Density	32768(dot/ m ²)	16384(dot/ m ²)	9216(dot/ m ²)
Module Size(mm)	500mm(Width)*375mm(H eight)*50mm(Thickness) 50mm (Depth)	500mm(Width)*375mm(H eight)*50mm(Thickness) 50mm (Depth)	500mm(Width)*375mm(H eight)*50mm(Thickness) 50mm (Depth)
Module Resolution	128 * 48	128 * 64	96 * 48
LED Type	SMD 3 in 1	SMD 3 in 1	SMD 3 in 1
Brightness(cd/ m ²)	5500	5500	5500
Transparency	85%	85%	85%
Viewing Angel	160°	160°	160°
Color Depth	14bits	14bits	14bits
Scan Duty	1/4	1/4	1/4
Refresh Rate(Hz)	3840	3840	3840
Frame Rate(Hz)	60	60	60
Avg. Power(W/ m ²)	200	280	280
Max. Power(W/m ²)	700	1000	1000
Maintenance	Back Maintenance	Back Maintenance	Back Maintenance
Ingress Protection	IP42	IP42	IP42
Working Temp	-10~40°C	-10~40°C	-10~40°C
Weight	12kg/ m ²	12kg/ m ²	12kg/ m ²
Accessories	setup packages, distributor media player	setup packages, distributor media player	setup packages, distributor media player



Ultra-transparency

Ultra transparency: Is at 85%.

Super Stunning


Super Stunning: The smallest Pixel pitch: 3mm, High refresh rate: 3840Hz; High contrast ratio: 1500:1



Ultra High Brightness/Energy efficient

With Ultra High Brightness: the clarity of the screen is not affected by strong direct sunlight.

Energy efficient: Power consumption less than 170 Watts per square metre.

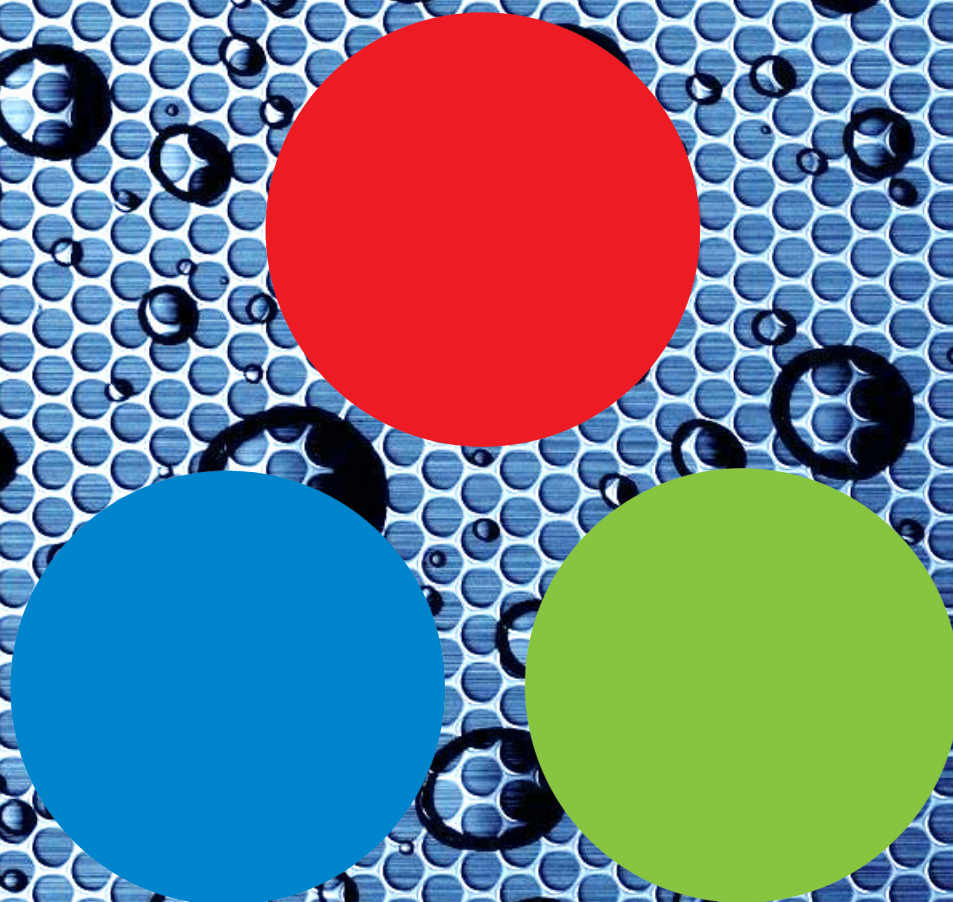

V SCREEN

Australian Premier LED Screen