

**V:SCREEN**

Premier LED Screen


V Screen products are distributed by J Distribution

Disclaimer: All product information is accurate as of time of printing, any errors and omissions excepted. Information and specifications are subject to change without prior written notice. Warranty applies as per manufacturer's standard. | 2019

Enquiries: [sales@jdistribution.com.au](mailto:sales@jdistribution.com.au)


[www.jdistribution.com.au](http://www.jdistribution.com.au)

# Ultra X

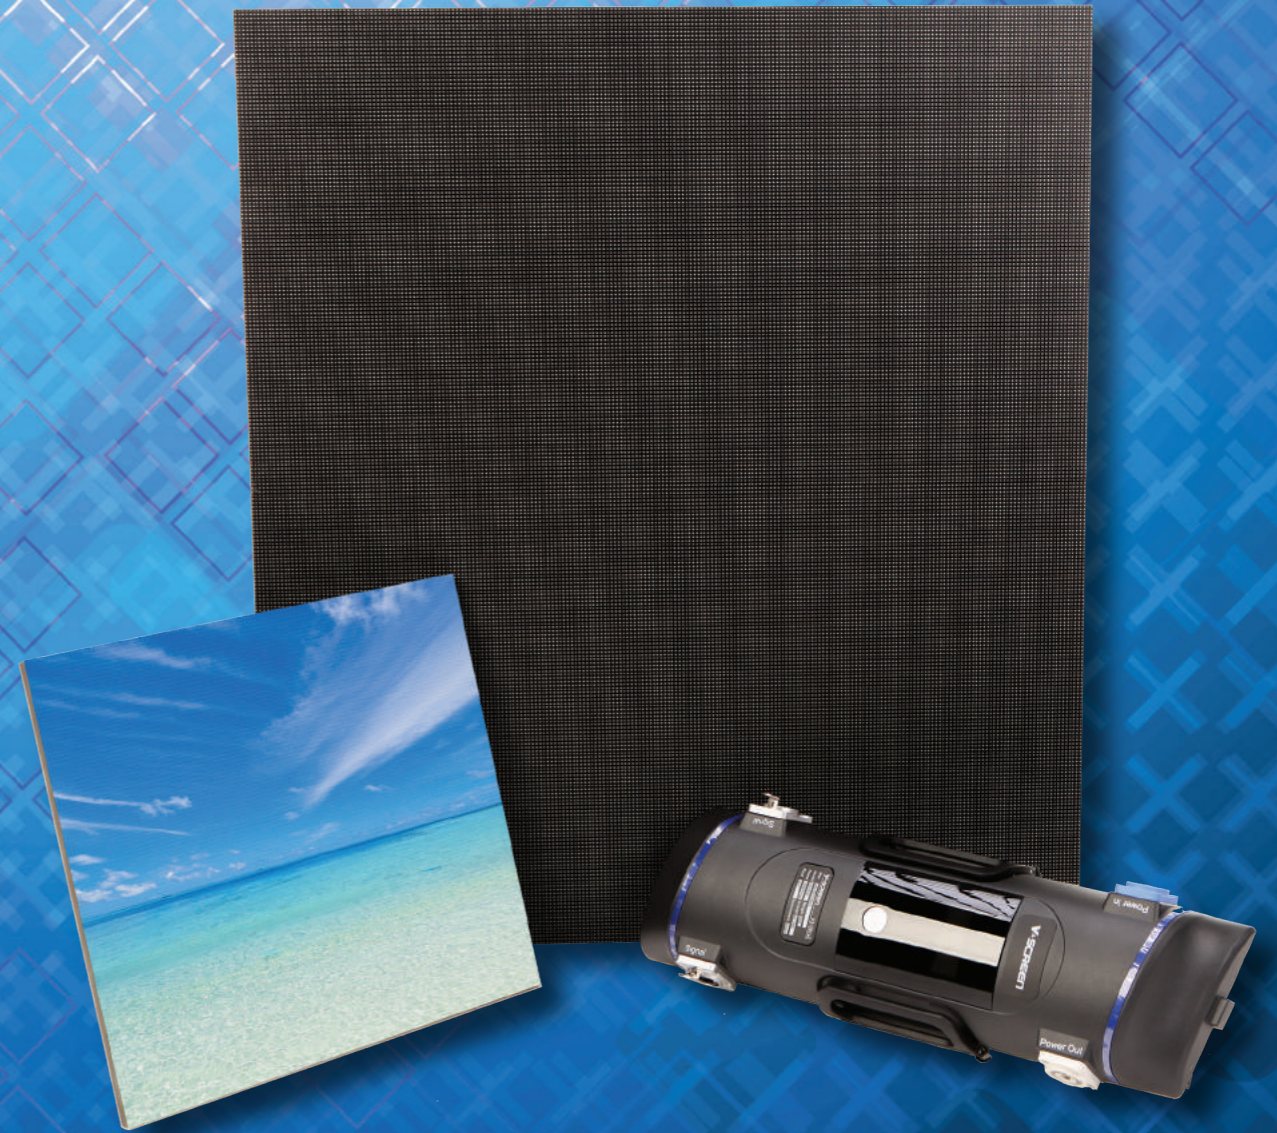


**V:SCREEN**

Premier LED Screen

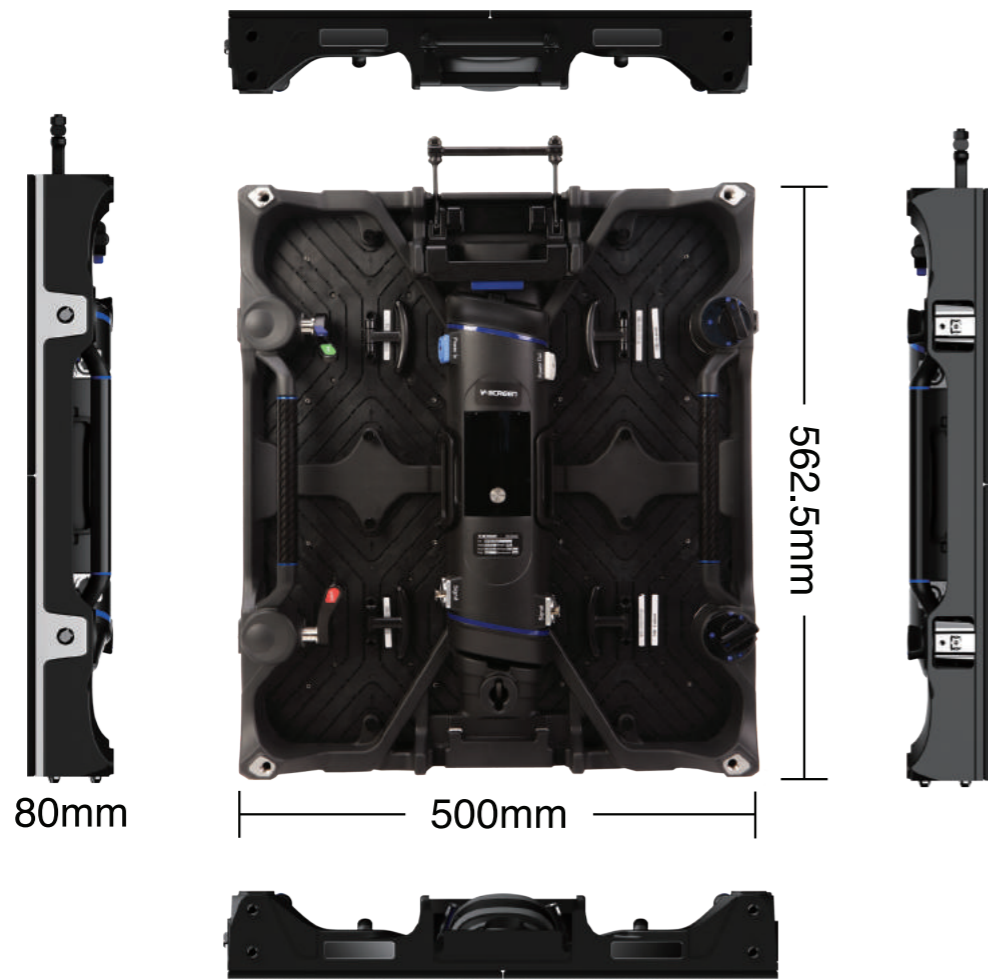


### 16:9 Ratio

Pictures display beautifully with a screen ratio of 16:9, a high gray scale level of 16 Bit and a high refresh rate.

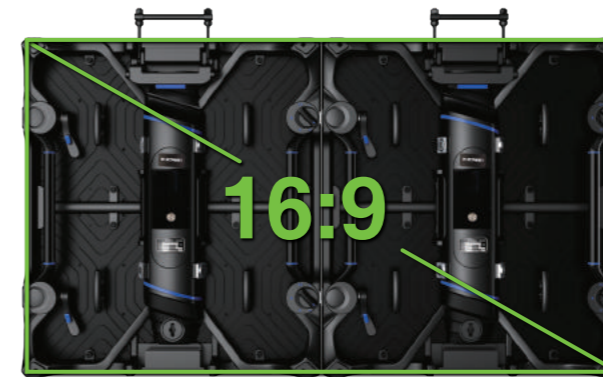

### One Button Connection

The Ultra X screen utilises industry-leading smart connection technology allowing for one button connection.

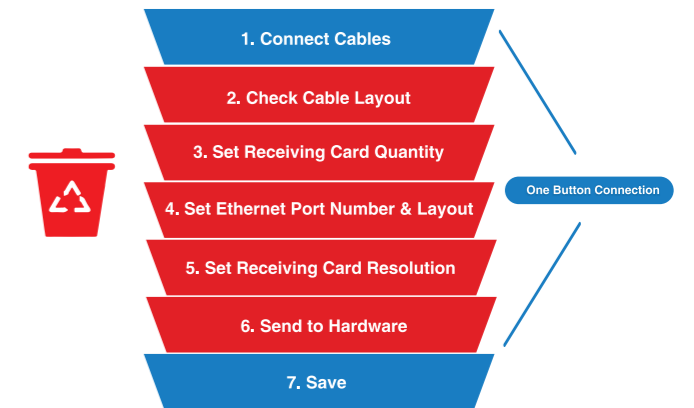


### Fast & Convenient

Design features of the Ultra X screen allow for full front service and maintenance and include anti-damage measures.



### Stage Shaping

The stages used for these screens have customizable creative curve locks allowing for a connection within 0.1mm accuracy to be completed in two steps.

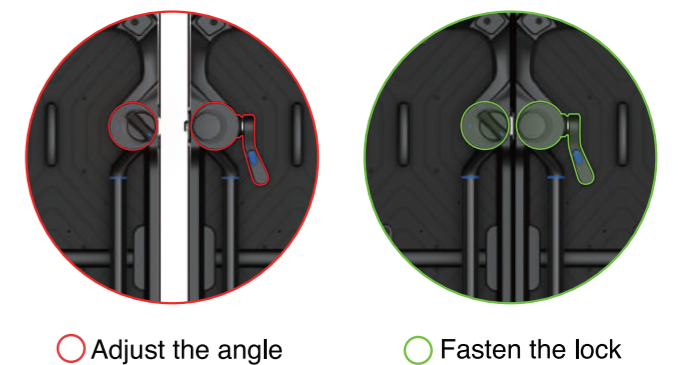


## Product Specifications

Product	Ultra 2	Ultra 2.6	Ultra 2.9
• Pixel Pitch (mm)	2.23	2.604	2.97
• Cabinet Size (WxHxD/mm)	500 x 562.5 x 80	500 x 562.5 x 80	500 x 562.5 x 80
• Cabinet Resolution	224 x 252	192 x 216	168 x 189
• Cabinet Weight (Kg)	10	10	10
• Brightness (Nit)	2500	2500	2700
• Refresh Rate (Hz)	≥2880	≥3840	≥3840
• Gray Scale (Bit)	16	16	16
• IP Rating (Front/Rear)	IP40/IP21	IP40/IP21	IP40/IP21
• Max./Avg Power Consumption (W/m <sup>2</sup> )	600/200	450/150	660/220
• Curve	±5°	±5°	±5°

### Intelligent Automatic Calibration

The intelligent Ultra X modules have automatic calibration.

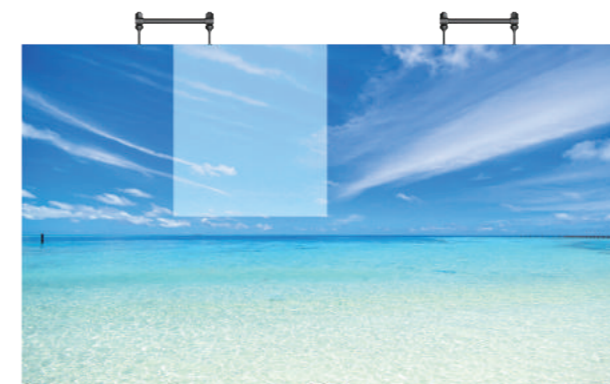

### Modular Design

The screen has a modular design and uses an 'easy connect' installation.

